



Features of Screw Ground Terminal Blocks



CPE 2.5

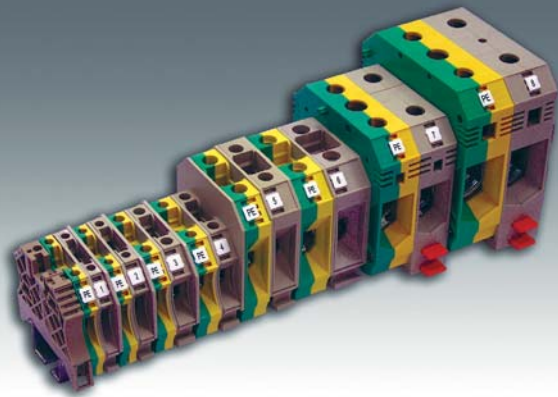











Features of Screw Ground Terminal Blocks


- Very low contact resistance accordance with ground connections in wiring systems of international standards.
- Green-yellow color connection coding was followed by DECA's ground terminal blocks.
- Easy for the extension of terminal connection.
- Ease of handling and safe connection.
- Suitable for broad range of cross-section and types of wires.
- Wires can be connected without any special preparation.
- An excellent vibration proof protection against loosening.
- High reliability and maintenance free.
- Easy mounting and dismounting from the terminal rail.

接地型接線座之特性


- 極低的接觸阻抗，符合嚴格的地線連接國際標準規範
- 進聯的接地端子連結設計，符合綠色-黃色相間的國際標準規範
- 容易擴充及延伸性佳
- 操作簡易且連結處安全性高
- 適合範圍寬廣的導線線徑
- 簡易的導線連接方式
- 優良的抗震防鬆設計
- 高可靠度且無需維護保養
- 接線座從軌道上安裝及拆卸容易

Specifications (產品規格)	2.5 mm ²	
Technical Data (技術參數)	Rated voltage/Rated current/Wire size	
UL	 AWG 12-26	
CSA	AWG 12-26	
IEC	0.5-2.5 mm ²	
Insulating impulse voltage withstand / Pollution degree (額定衝擊電壓 / 污染等級)	8KV / 3	
Torque (lb-in) (扭緊力矩)	7	
Clamping Screw (M) (螺絲)	M3	
Insulation stripping length(mm) (剝線長度)	10-14 mm	
Material/Available Color (材質顏色)		
Rail Dimensions (導軌尺寸)	T / W / H (mm)	
For TS35x7.5 	5 x 57 x 47.5	
For TS35x15 	5 x 57 x 55	
Accessories (附件)	Cat. No.	Qty.
End Bracket (終端擋板) 	SEW35	50
	CEW35/2	50
Comb Link (邊接式聯接件) 	CQB 2.5/2	50
	CQB 2.5/3	50
	CQB 2.5/10	20
Marking Tags (標記號) 	W5 W5Z W5K	500
	W7 W7Z W7K	400
Protection Cover (防觸蓋) 	DP1	20
Retaining Plates (中界板) 	AD1	50
Tool (工具) 	DS3	


CPE 4



CPE 6




CPE 10




Specifications (產品規格)	4 mm ²	6 mm ²	10 mm ²
Technical Data (技術參數)	Rated voltage/Rated current/Wire size	Rated voltage/Rated current/Wire size	Rated voltage/Rated current/Wire size
UL	AWG 10-26	AWG 8-26	AWG 6-16
CSA	AWG 10-26	AWG 8-26	AWG 6-16
IEC	0.5-4mm ²	0.5-6mm ²	1.5-10mm ²
Insulating impulse voltage withstand / Pollution degree (額定衝擊電壓 / 污染等級)	8KV / 3	8KV / 3	8KV / 3
Torque (lb-in) (扭緊力矩)	8.5	16	18
Clamping Screw (M) (螺絲)	M3	M4	M4
Insulation stripping length(mm) (剝線長度)	10-14 mm	12-16 mm	12-16 mm
Material/Available Color (材質顏色)			
Rail Dimensions (導軌尺寸)	T / W / H (mm)	T / W / H (mm)	T / W / H (mm)
For TS35x7.5	6 x 57 x 47.5	8 x 57 x 47.5	10 x 57 x 47.5
For TS35x15	6 x 57 x 55	8 x 57 x 55	10 x 57 x 55
Accessories (附件)	Cat. No. Qty.	Cat. No. Qty.	Cat. No. Qty.
End Bracket (終端擋板)	SEW35 50	SEW35 50	SEW35 50
	CEW35/2 50	CEW35/2 50	CEW35/2 50
Comb Link (邊接式聯接件)	CQB 4/2 50	CQB 6/2 50	CQB 10/2 50
	CQB 4/3 50	CQB 6/3 50	CQB 10/3 50
	CQB 4/10 20	CQB 6/10 20	CQB 10/4 20
Marking Tags (標記號)	W6 W6Z W6K 500	W6 W6Z W6K 500	W6 W6Z W6K 500
	W8 W8Z W8K 400	W8 W8Z W8K 400	W8 W8Z W8K 400
Protection Cover (防觸蓋)	DP1 20	DP1 20	DP1 20
Retaining Plates (中界板)	AD1 50	AD1 50	AD1 50
Tool (工具)	DS3	DS4	DS4


CPE 16



CPE 35



CPE 50






Specifications (產品規格)	16 mm ²	35 mm ²	50 mm ²
Technical Data (技術參數)	Rated voltage/Rated current/Wire size	Rated voltage/Rated current/Wire size	Rated voltage/Rated current/Wire size
UL	AWG 6-14	AWG 2-10	AWG 1/0-6
CSA	AWG 6-14	AWG 2-10	AWG 1/0-6
IEC	2.5-16mm ²	4-35mm ²	16-50mm ²
Insulating impulse voltage withstand /Pollution degree (額定衝擊電壓 /污染等級)	8KV / 3	8KV / 3	8KV / 3
Torque (lb-in) (扭緊力矩)	35	51	70
Clamping Screw (M) (螺絲)	M5	M6	M6
Insulation stripping length(mm) (剝線長度)	14-18 mm	14-18 mm	20-25 mm
Material/Available Color (材質顏色)			
Rail Dimensions (導軌尺寸)	T / W / H (mm)	T / W / H (mm)	T / W / H (mm)
For TS35x7.5	12 x 57 x 63.5	16 x 57 x 63.5	20 x 70.5 x 76
For TS35x15	12 x 57 x 71	16 x 57 x 71	20 x 70.5 x 83.5
Accessories (附件)	Cat. No. Qty.	Cat. No. Qty.	Cat. No. Qty.
End Bracket (終端擋板)	SEW35 50	SEW35 50	SEW35 50
	CEW35/1 50	CEW35/1 50	CEW35/1 50
Comb Link (邊接式聯接件)			
MarkingTags (標記號)	W6 W6Z W6K 500	W6 W6Z W6K 500	W6 W6Z W6K 500
	W8 W8Z W8K 400	W8 W8Z W8K 400	W8 W8Z W8K 400
Protection Cover (防觸蓋)	DP1 20	DP1 20	
Retaining Plates (中界板)	AD2 50	AD2 50	
Tool (工具)	DS5	S6	DS5 DS6

CPE 95



CPE 2.5N

CPE 2.5/3N




Specifications (產品規格)	95 mm ²		2.5 mm ²		2.5 mm ²	
Technical Data (技術參數)	Rated voltage/Rated current/Wire size		Rated voltage/Rated current/Wire size		Rated voltage/Rated current/Wire size	
UL	c AWG 4/0-2		AWG 12-26		AWG 12-24	
CSA	AWG 4/0-2		AWG 12-26		AWG 12-24	
IEC	35-95mm ²		0.2-2.5mm ²		0.2-2.5mm ²	
Insulating impulse voltage withstand (額定衝擊電壓/Pollution degree /污染等級)	8KV / 3		8KV / 3		6KV / 3	
Torque (lb-in) (扭緊力矩)	90		7		7	
Clamping Screw (M) (螺絲)	M8		M3		M2.6	
Insulation stripping length(mm) (剝線長度)	30-35 mm		10-14 mm		8 mm	
Material/Available Color (材質顏色)						
Rail Dimensions (導軌尺寸)	T / W / H (mm)		T / W / H (mm)		T / W / H (mm)	
For TS35x7.5	25 x 80 x 90		5 x 42.5 x 47.5		5.2x50.5x47	
For TS35x15	25 x 80 x 97.5		5 x 57 x 55		5.2x50.5x54.5	
Accessories (附件)	Cat. No.	Qty.	Cat. No.	Qty.	Cat. No.	Qty.
End Bracket (終端擋板)	SEW35	50	SEW35	50	CEW35/2	50
	CEW35/1	50	CEW35/2	50	SEW35	50
Comb Link (邊接式聯接件)	CQB 95/2	50	CQB 2.5/2	50	CQB2.5/2	50
	CQB 95/3	50	CQB 2.5/3	50		
			CQB 2.5/10	20		
Marking Tags (標記號)	W6 W6Z W6K	500	W5 W5Z W5K	500	W5 W5Z W5K	500
	W8 W8Z W8K	400	W7 W7Z W7K	400		
Protection Cover (防觸蓋)			DP1	20		
Retaining Plates (中界板)			AD1	50		
Tool (工具)	DS6 DS8		DS3		DS3	


CPE 4N



CPE 4/3N













CPE 6N



Specifications (產品規格)	4 mm ²		4 mm ²		6 mm ²	
Technical Data (技術參數)	Rated voltage/Rated current/Wire size		Rated voltage/Rated current/Wire size		Rated voltage/Rated current/Wire size	
UL	AWG 10-26		AWG 10-24		AWG 8-26	
CSA	AWG 10-26		AWG 10-24		AWG 8-26	
IEC	0.2-4mm ²		0.2-4mm ²		0.2-6mm ²	
Insulating impulse voltage withstand /Pollution degree (額定衝擊電壓 /污染等級)	8KV / 3		6KV / 3		8KV / 3	
Torque (lb-in) (扭緊力矩)	8.5		8		16	
Clamping Screw (M) (螺絲)	M3		M3		M4	
Insulation stripping length(mm) (剝線長度)	10-14 mm		8 mm		12-16 mm	
Material/Available Color (材質顏色)						
Rail Dimensions (導軌尺寸)	T / W / H (mm)		T / W / H (mm)		T / W / H (mm)	
For TS35x7.5	6 x 42.5 x 47.5		6.2x50.5x47		8 x 42.5 x 47.5	
For TS35x15	6 x 57 x 55		6.2x50.5x54.5		8 x 57 x 55	
Accessories (附件)	Cat. No.	Qty.	Cat. No.	Qty.	Cat. No.	Qty.
End Bracket (終端擋板)	SEW35	50	CEW35/2	50	SEW35	50
	CEW35/2	50	SEW35	50	CEW35/2	50
Comb Link (邊接式聯接件)	CQB 4/2	50		50	CQB 6/2	50
	CQB 4/3	50	CQB4/2	50	CQB 6/3	50
	CQB 4/10	20		20	CQB 6/10	20
MarkingTags (標記號)	W6 W6Z W6K	500	W6 W6Z W6K	500	W6 W6Z W6K	500
	W8 W8Z W8K	400			W8 W8Z W8K	400
Protection Cover (防觸蓋)	DP1	20			DP1	20
Retaining Plates (中界板)	AD1	50			AD1	50
Tool (工具)	DS3		DS3		DS4	

CPE 10N



Specifications (產品規格)	10 mm ²	
Technical Data (技術參數)	Rated voltage/Rated current/Wire size	
UL	AWG 6-16	
CSA	AWG 6-16	
IEC	0,5-4mm ²	
Insulating impulse voltage withstand (額定衝擊電壓 / Pollution degree / 污染等級)	8KV / 3	
Torque (lb-in) (扭緊力矩)	18	
Clamping Screw (M) (螺絲)	M4	
Insulation stripping length(mm) (剝線長度)	12-16 mm	
Material/Available Color (材質顏色)		
Rail Dimensions (導軌尺寸)	T / W / H (mm)	
For TS35x7.5 	10 x 42.5 x 47.5	
For TS35x15 	10 x 57 x 55	
Accessories (附件)	Cat. No.	Qty.
End Bracket (終端擋板) 	SEW35	50
	CEW35/2	50
Comb Link (邊接式聯接件) 	CQB 10/2	50
	CQB 10/3	50
	CQB 10/4	20
MarkingTags (標記號) 	W6 W6Z W6K	500
	W8 W8Z W8K	400
Protection Cover (防觸蓋) 	DP1	20
Retaining Plates (中界板) 	AD1	50
Tool (工具) 	DS4	